



# Detached Garage Construction Specifications

Please complete all the required information to process your application.

All contractors hired to complete the project must be registered in the Village of Stickney



Select Style      Hip \_\_\_\_\_ Gable \_\_\_\_\_  
 Roof Elevation    (max 14'6") \_\_\_\_\_  
 Wall Height        \_\_\_\_\_  
 Total Sq. Ft.      (max 750) \_\_\_\_\_

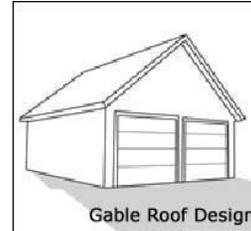

## Other Requirements

- \_\_\_ Permit application completed
- \_\_\_ Current Plat of Survey
- \_\_\_ Set of detailed plans/drawings
- \_\_\_ Electrical device locations
- \_\_\_ Electrical service to garage details
- \_\_\_ 3' minimum side setback
- \_\_\_ 5' minimum rear lot line
- \_\_\_ 16' minimum front of lot line
- \_\_\_ List of all contractors
- \_\_\_ J.U.L.I.E. contacted before digging
- \_\_\_ Signed contracts

### Header Requirements

- Doors or windows  
 5' or less (2) 2x8  
 5'-8'      (2) 2x12


### Overhead Door - Gable Roof

- 8' (2) 2x8  
 16' (2) 2x12

### Overhead Door - Hip Roof

- 8' (2) 2x12  
 16' (3) 2x12 or (2) 11 1/4" Micro Lam

## Wall & Foundation Section

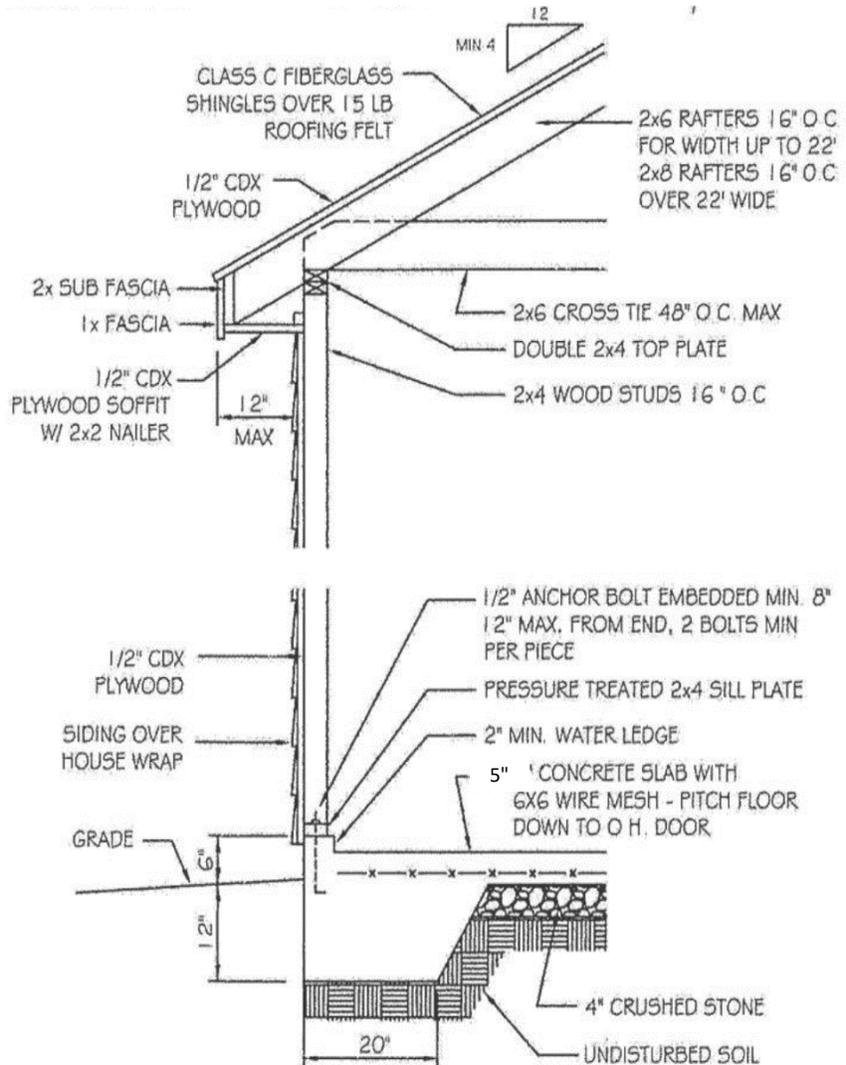

**Village of Stickney Building Department**  
**Email: [building@villageofstickney.com](mailto:building@villageofstickney.com)**

**6533 Pershing Rd.**  
**Ph: 708-749-4400**